



Anyway Floor

THE QUALITY OF LIFE

VARIETY OF STYLES

Anyway Floor Co.,LTD.



Deutsches
Institut
für
Bautechnik

DIBt



Specification of Anti-static PVC Floor Roll

Material	PVC
Thickness	2mm, 3mm
Size	2.0mm x 20m/15m, 600mm x 600mm, 900mm x 900mm
Type	Anti-static
Warranty	10 years of service life can be guaranteed
Shipment	*Samples: by air; *Orders: by ship
Resistance to	Excellent

Environmentally friendly materials

Passed ISO14001 environmental quality system certification

Comfortable sound absorption

The product has sound absorption and quiet performance, which effectively reduces noise generation.

Health antibacterial

Through the National Hazardous Substance Limit Test (GB18586), the product does not contain any substances harmful to the human body.

Durable

Durable and good in pressure resistance.


Surface using RHPP processing technology

The "RHPP" treatment is called "continuous high-pressure sealing and smooth surface treatment", which increases the smoothness and scratch resistance of the floor surface.

Single-layer homogeneous core-transparent elastic floor, reinforced permeated polyurethane PUR anti-fouling treatment, anti-fouling ingredients penetrate into the bottom, can be free of wax maintenance for life, saving 48% maintenance cost

同质透心防静电PVC卷材

Homogeneous
Anti-Static PVC Roll Floor

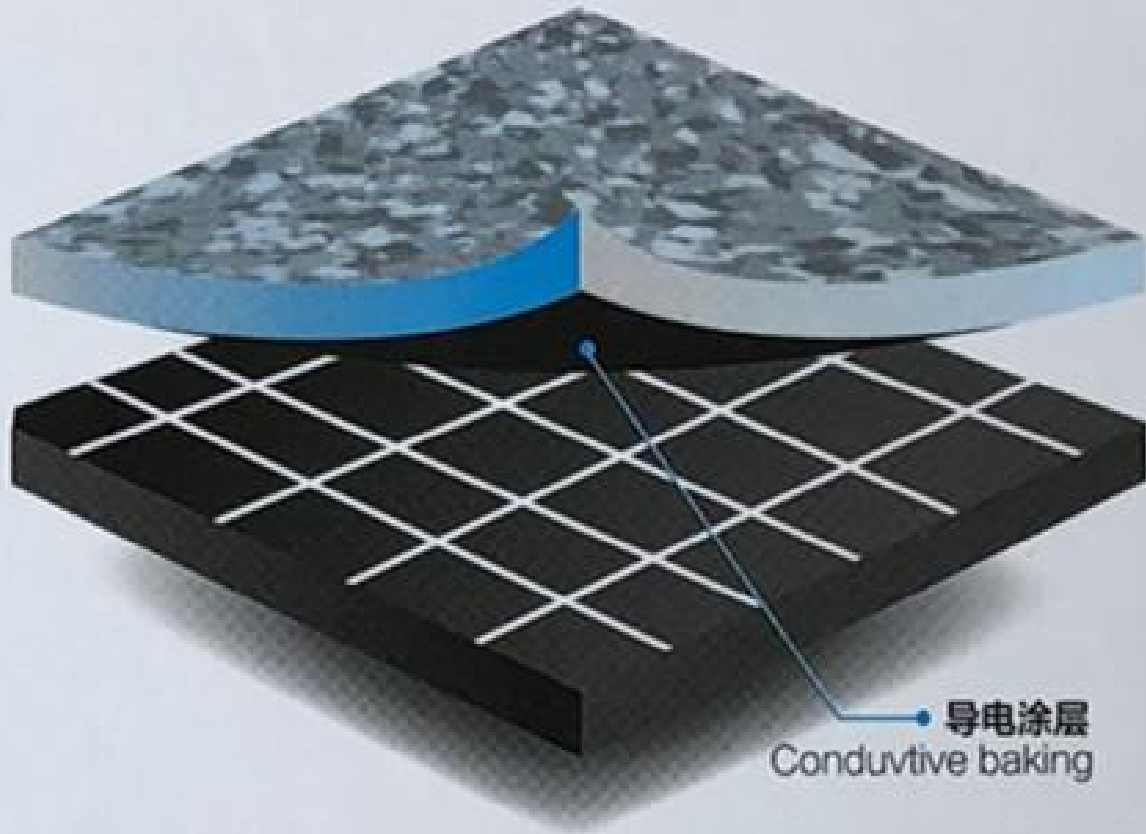

Technical Data	Standard	Unit	Result
Total Thickness	EN 428	mm	2
Total Weight	EN 430	g/m ²	3100
Roll Width	EN 426	m	2
Roll Length	EN 426	m	20
Safety Criteria			
Safety Criteria	Standard	Value	
Flammability	GB 8624-1997	GB 8624 B1	
Slip Resistance Dry	EN 13893	≥ 0.3	
Slip Resistance Wet	EN 51 130	R9	
Electrical Resistance	EN 1081	≥ 10 (9-10)	
Chemicals Resistance	EN 423	Good	
Performance			
Performance	Standard	Value	
Wear Resistance	EN 649	T Level	
Residual Indentation	EN 433	0.04mm	
Castor Wheel Test	EN 425	Suitable	
Color Fastness	ISO 105-BO2	≥6	
Dimensional Stability	EN 434	≤0.04%	
Flexibility	EN 435	Excellent	
Impact Sound Reduction	EN ISO 717/2	Approx. 0.04	
Surface Treatment		UV	

Our products adhering to the concept of health,safety, eco-environmental, and continuously optimize and improve the PVC floor formula, our products use new generation of plasticizer DOTP.

----Only our products in market don't contain benzene ring structure in plasticizer. (phthalate, harmful to human health).

----Only our plasticizer in market can meet the standard of kids toys and food.

TVOC is a general for volatile organic compounds,mainly come from artificial products combustion products of fuels and releases(interior decoration materials, paints, furniture, floors, etc.).

Our PVC flooring is the top level of TVOC, toensure the optimal indoor air quality.

ADVANTAGE

ATTITUDE



Fire Resistance



Smoke Resistance



Scratch Proof




Homogeneous



Waterproof



Comfortable

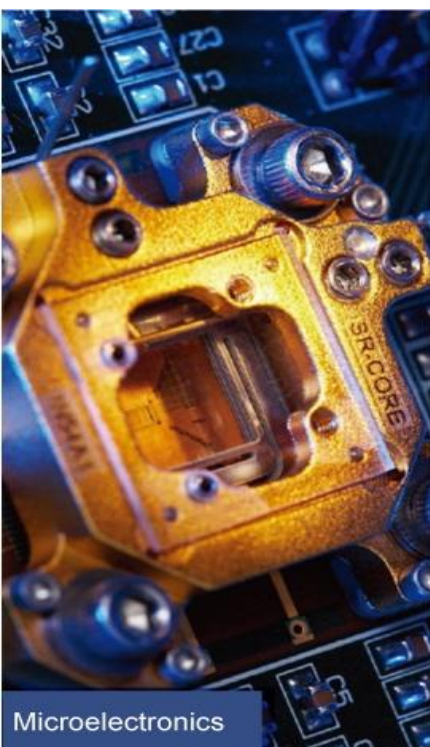

Microelectronics



Optical



Accessfloor



Life Science



Electronics



Aeronautics



Model:FEMT-1512



Model:FEMT-1513



Model:FEMT-1515



Model:FEMT-1516



Model:FEMT-1517



Model:FEMT-1518



Model:FEMT-1519



Model:FEMT-1520




Model:FEMT-1521





Model:FEMT-1502

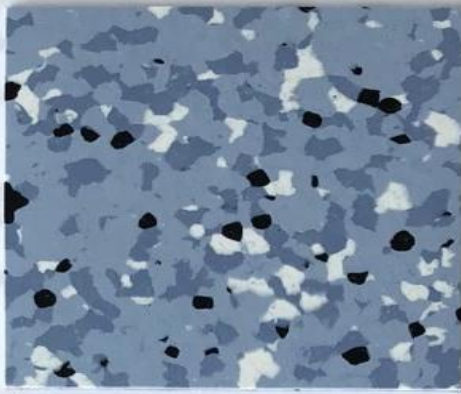


Model:FEMT-1522



Model:FEMT-1505




Model:FEMT-1506

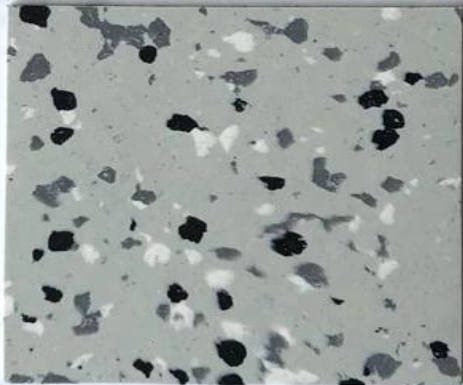


Model:FEMT-1507



Model:FEMT-1508

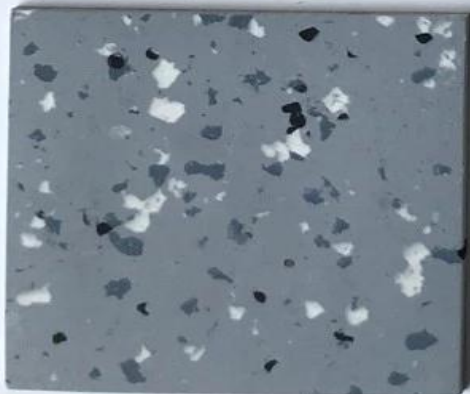


Model:FEMT-1509

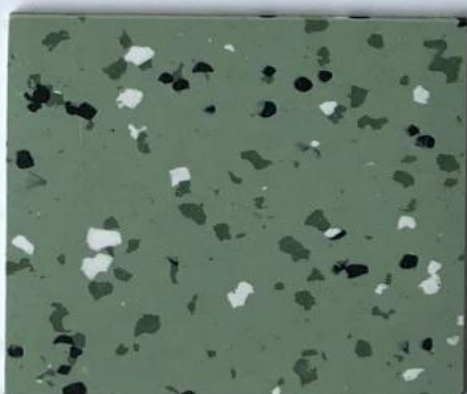


Model:FEMT-1510



Model:FEMT-1511

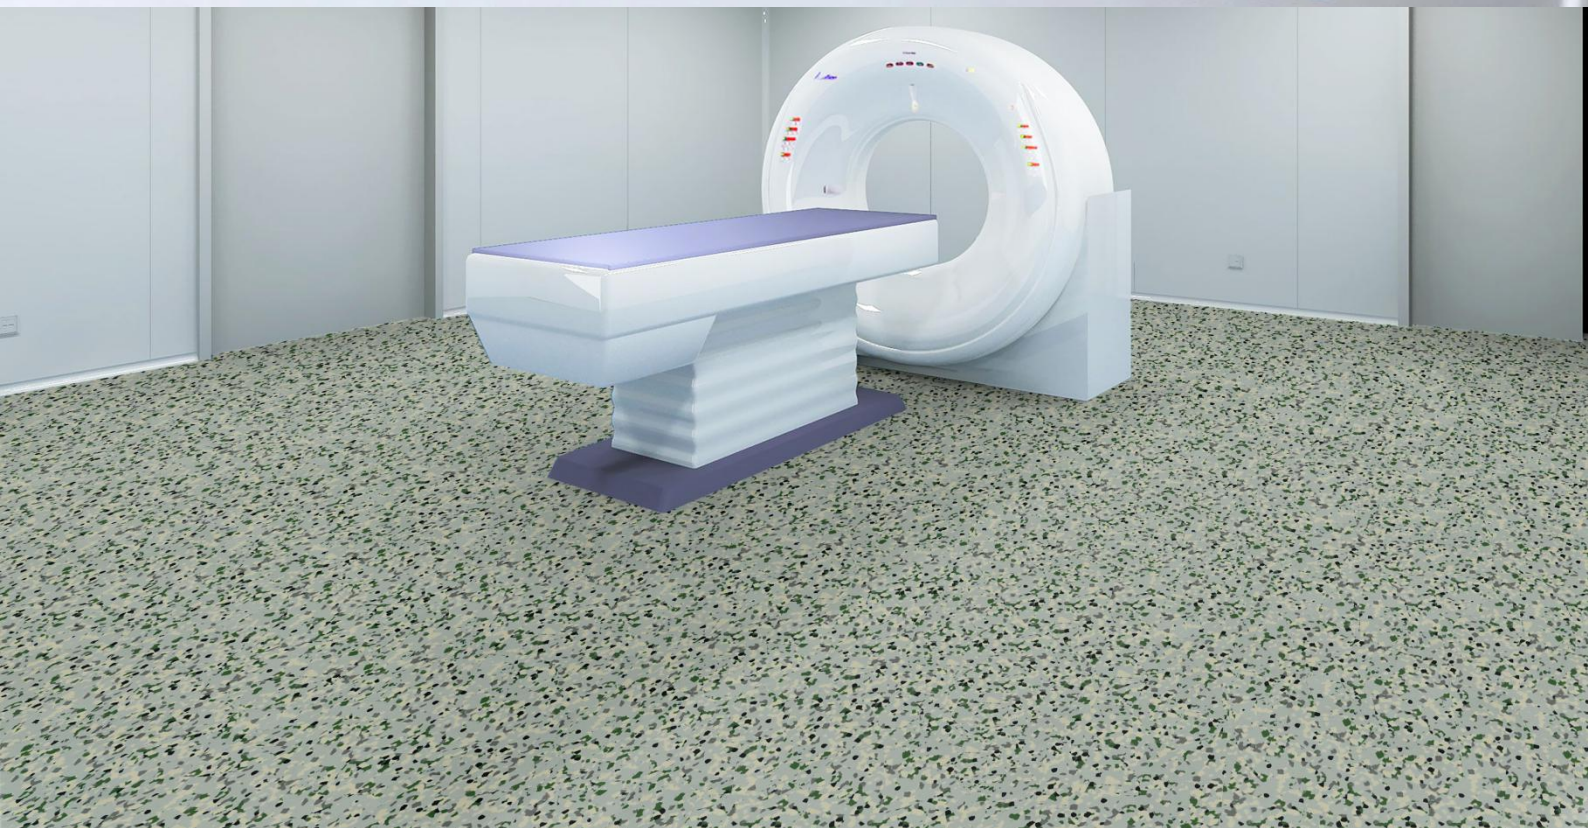



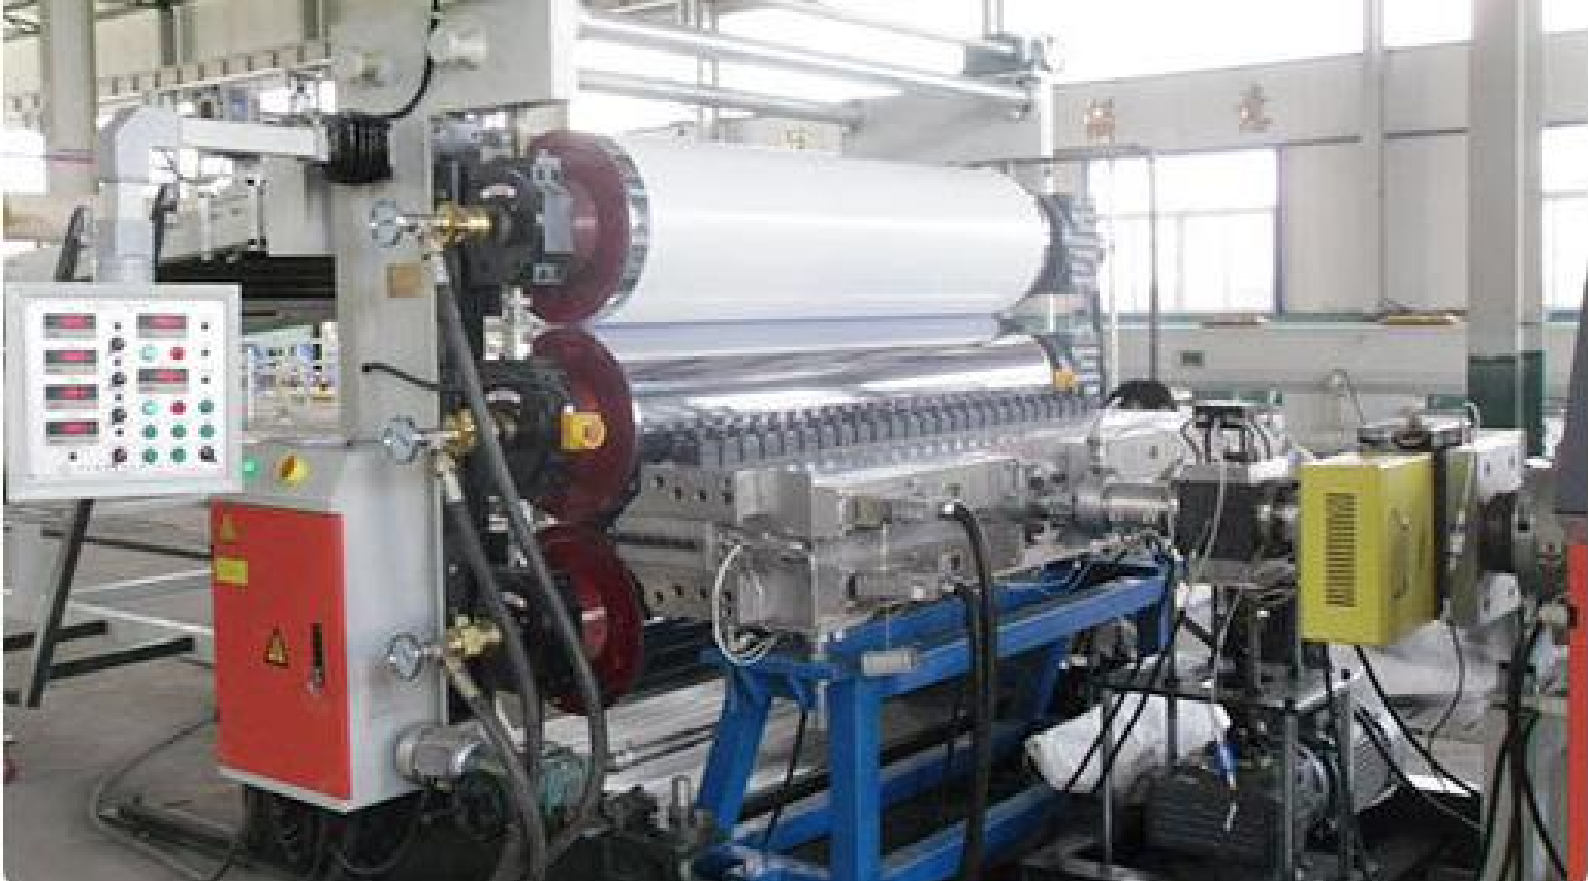

MORE THAN 20 YEARS HISTORY
300 WORKERS

OEM OEM AND ODM BOTH AVAILABLE



ADVANCED EQUIPMENTS



DELIVERY TIME WITHIN 7 DAYS
FAST AND ON-TIME



COMPETITIVE PRICE AND QUALITY



CONSIDERABLE AFTER-SALE
SERVICE

