

INOFLOOR WORLDWIDE LLC

Inofloor


HOMOGENOUS VINYL FLOOR
VINIL HOMOGENEO

Hospitals
Airports
Laboratories
Libraries
Office buildings
Restaurants
Schools

SOFT SKY
SERIES

HOMOGENOUS VINYL FLOOR
VINIL HOMOGENEO

Size : 1.5/2.0/2.5mm(T) X 2.0(W) X 20m(L)

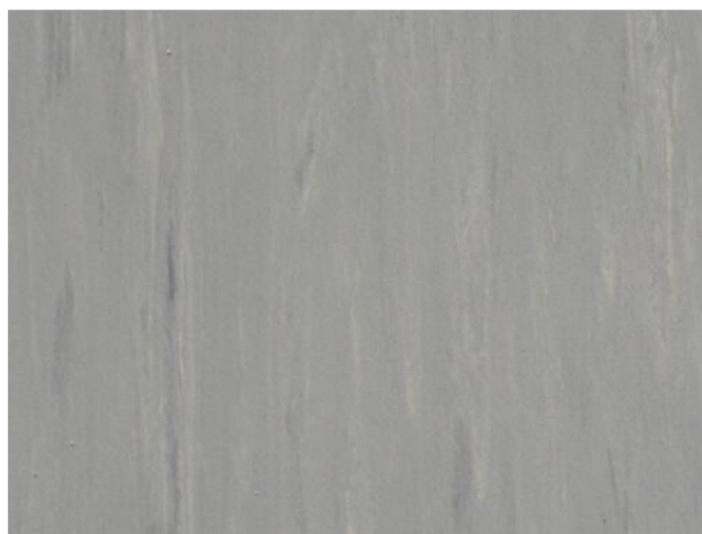

SK81006



SK81036



SK81004



SK81009


SOFT SKY

inofloor.com




HOMOGENOUS VINYL FLOOR
VINIL HOMOGÉNEO

Size : 1.5/2.0/2.5mm(T) X 2.0(W) X 20m(L)

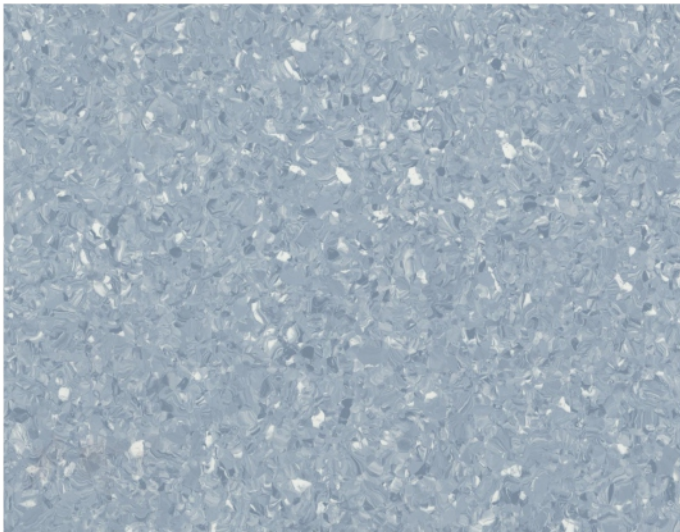


SK16815

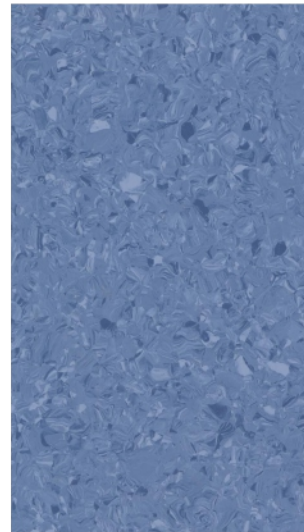


SK16819




SK16821

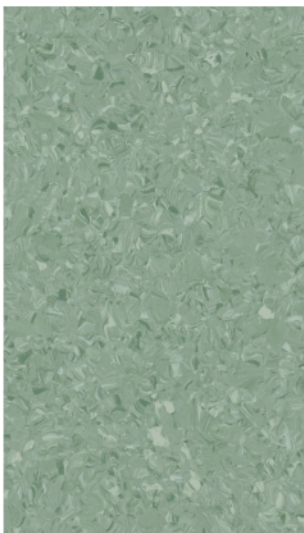

SK16822

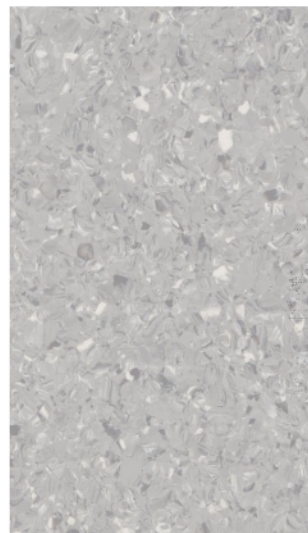

SK16825

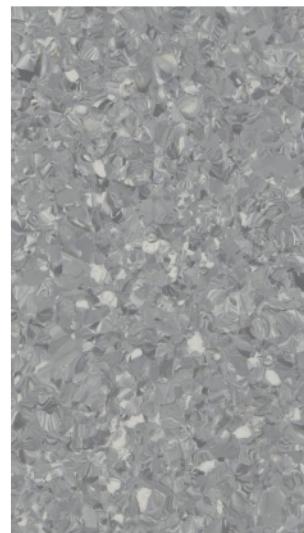

SK16827




SK16802



SK16803



SK16805

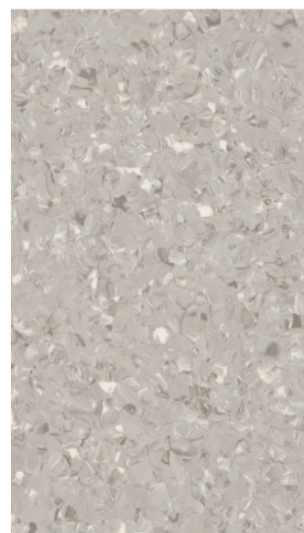


SK16812




SK16813

HOMOGENOUS VINYL FLOOR
VINIL HOMOGÉNEO


Size : 1.5/2.0/2.5mm(T) X 2.0(W) X 20m(L)

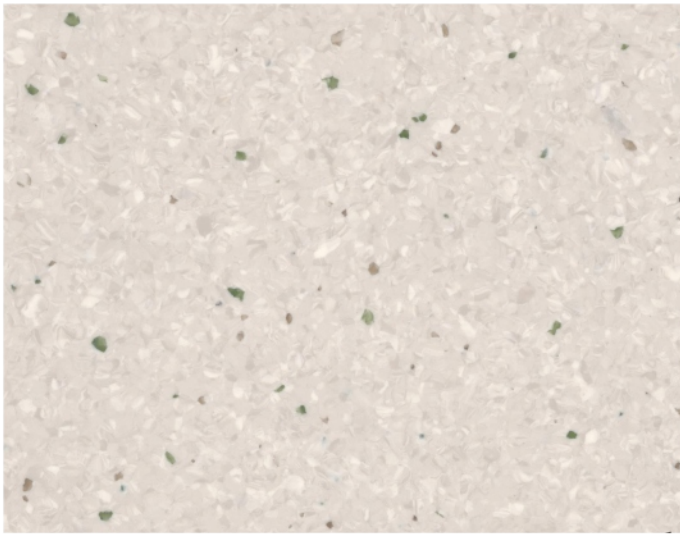


SK28X-162

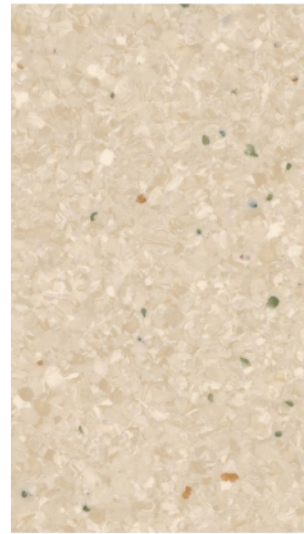


SK28X-178

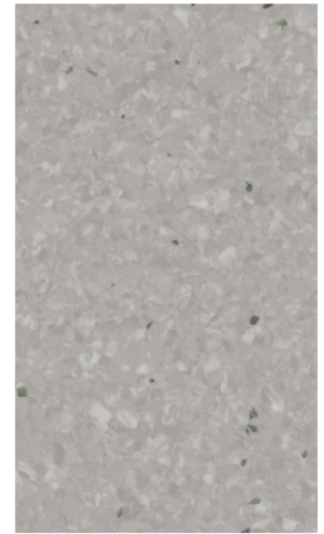


SK28X-158

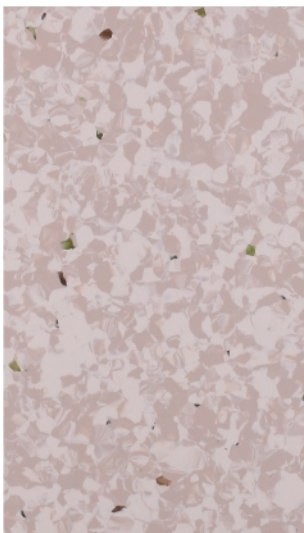

SK1002

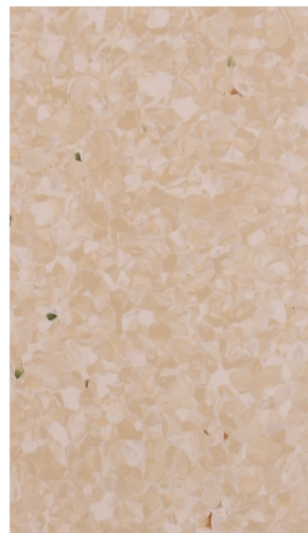


SK1003

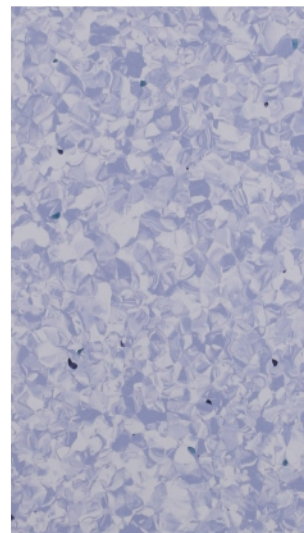


SK1014




SK1004

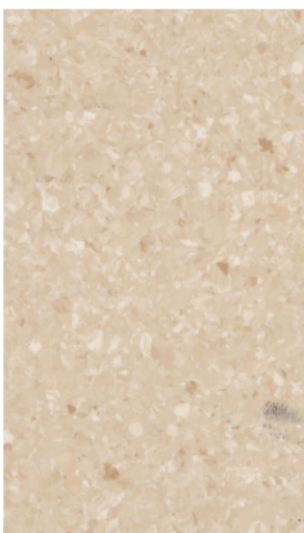


SK28X-112

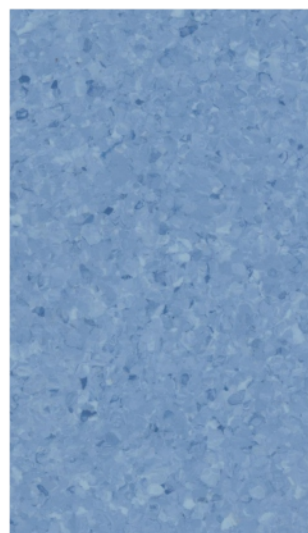

SK28X-109

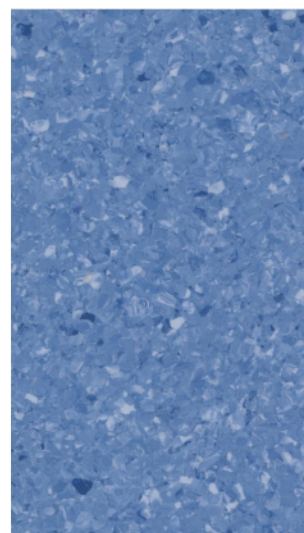


SK28X-108

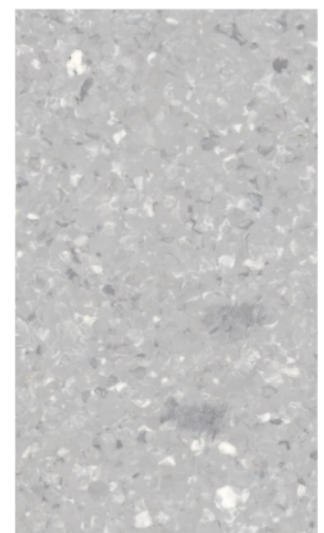


SK28X-151

HOMOGENOUS VINYL FLOOR
VINIL HOMOGENEO

Size : 1.5/2.0/2.5mm(T) X 2.0(W) X 20m(L)

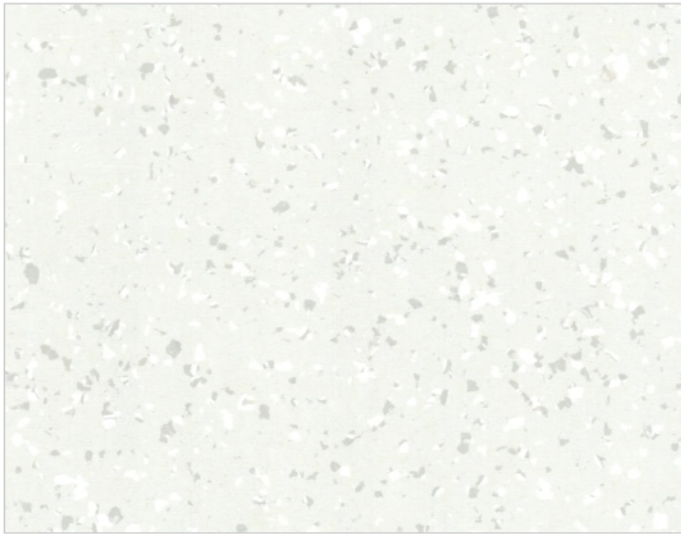


SK39629

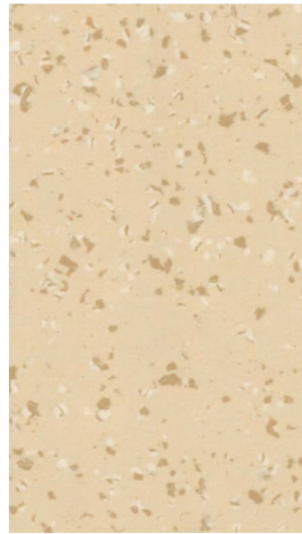


SK39620




SK39618

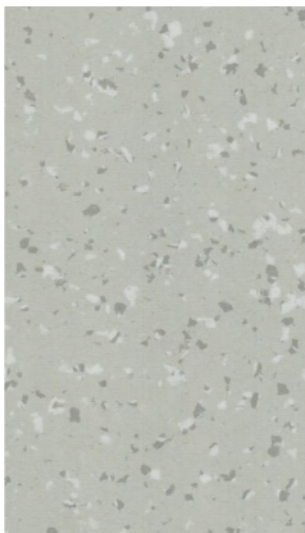


SK39614

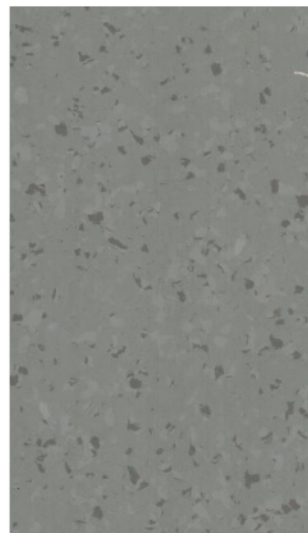


SK39613

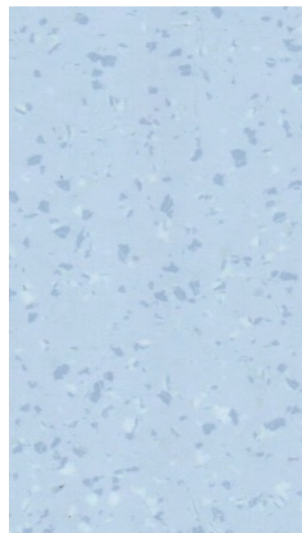


SK39628

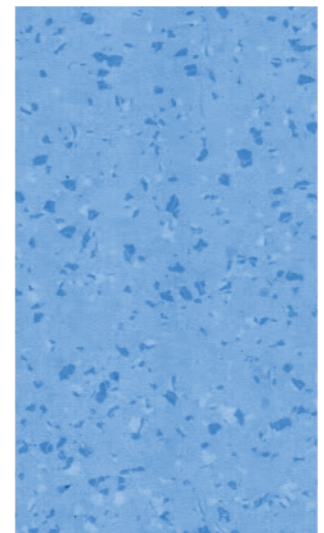


SK39660

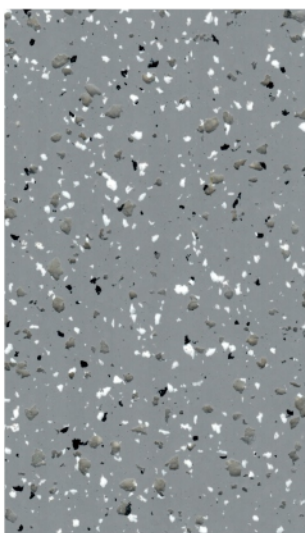


SK31002

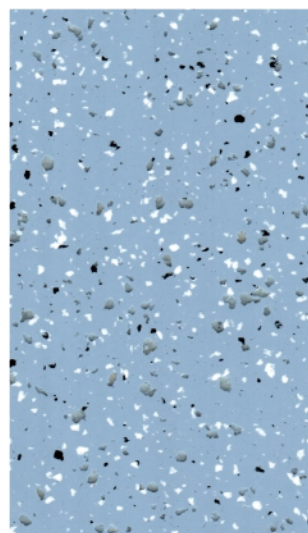

SK31006

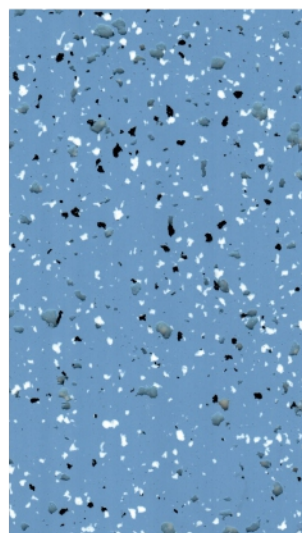


SK31009

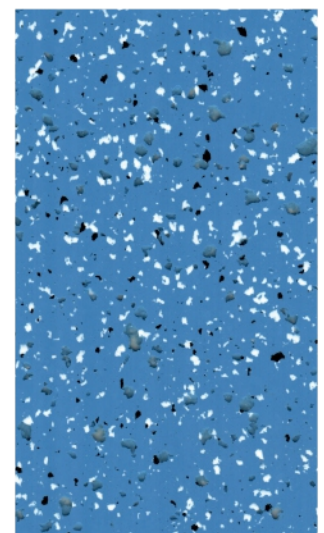


SK31007

CONDUCTIVE HOMOGENOUS VINYL FLOOR
VINIL HOMOGÉNEO


Size : 1.5/2.0/2.5mm(T) X 2.0(W) X 20m(L)

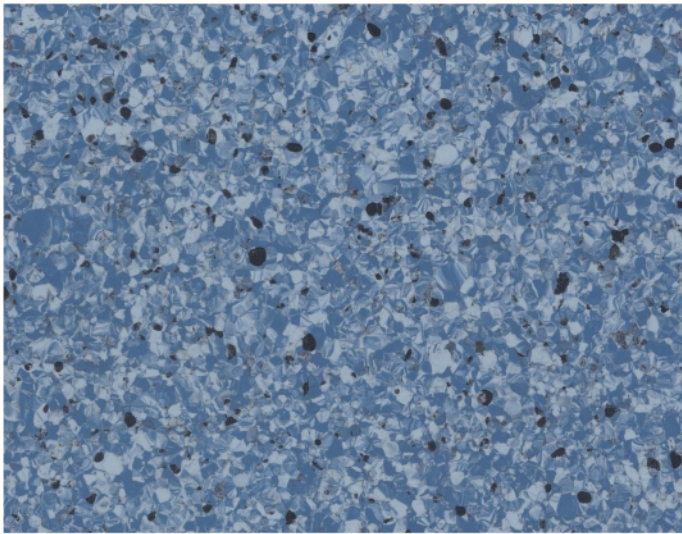


SKD019

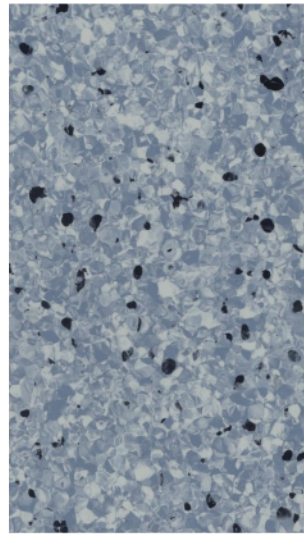


SKD018

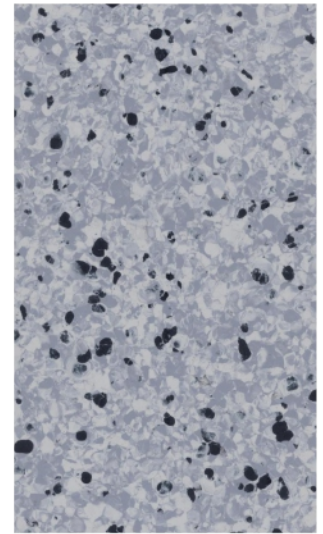


SKD015

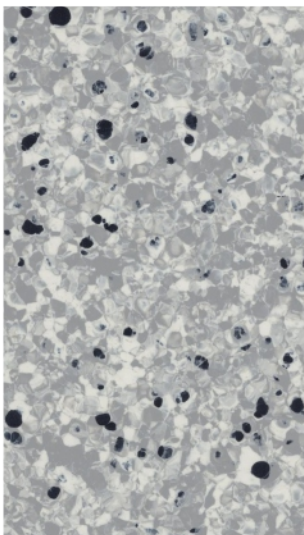


SKD013

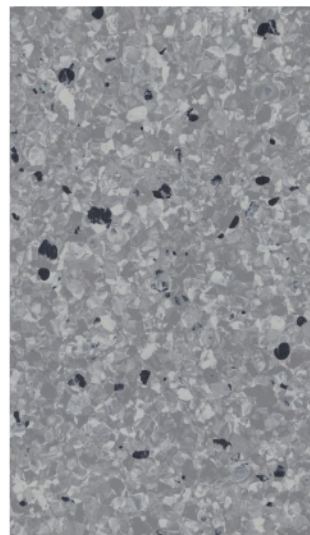


SKD014

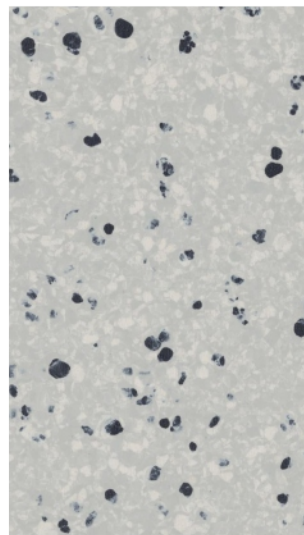


SKD020

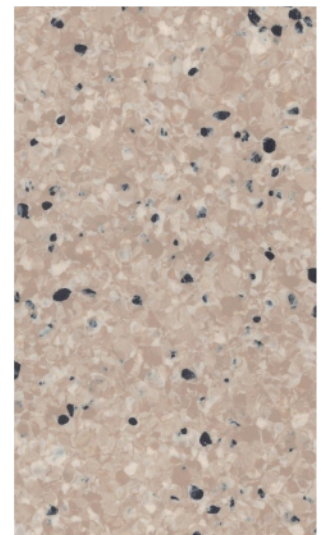


SKD011

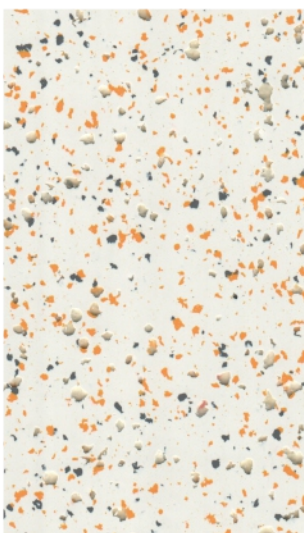


SK31010

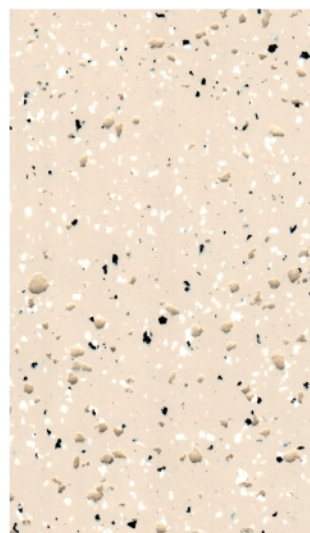

SK31004

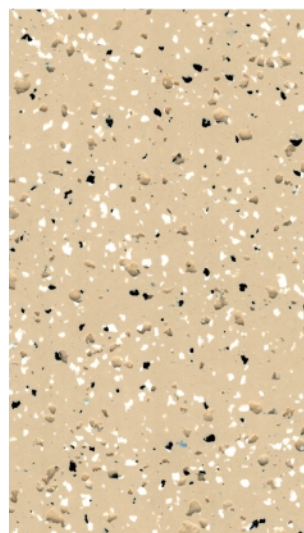



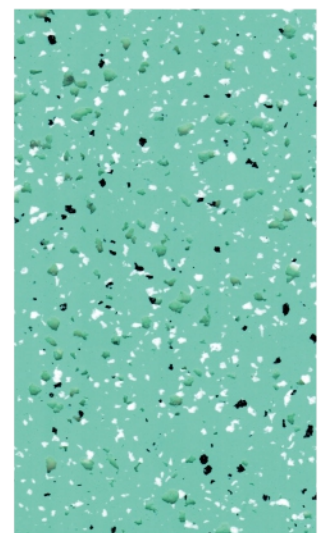


SK31005



SK31008

Technical Data

Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581-EN 649		Homogeneous Sheet
Material			Polyvinyl chloride
Cover			majorization king®  MK
Safety criteria			
Flammability	GB 8624-2012	class	B1
Slip resistance	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
Performance behaviour			
Sheet width	ISO 24341-EN 426	m	2
Sheet length	ISO 24341-EN 426	m	20
Overall thickness	ISO 24346-EN 428	mm	2.0
Total weight	ISO 23997-EN 430	kg/m ²	3.1
Wear resistance	EN 649	group	T
Dimensional stability	ISO 23999-EN 434	-	X : ≤0.4% Y : ≤0.4%
Color fastness	ISO 105-B02	rating	≥6
Resistance to staining	EN 423		No Stain 0
Bend resistance	GB/T 11982 2-2015		-
Antibacterial	ISO 22196		-
Anti iodine			Good
Classification			
Domestic	ISO 10874-EN 685	class	23 heavy duty
Commercial	ISO 10874-EN 685	class	34 very heavy duty
Industrial	ISO 10874-EN 685	class	43 heavy duty
Additional property			
Castor chair  ✓		Antistatic Behaviour  ✓	
Underfloor Heating  ✓		Chemical Resistance  ✓	

HOMOGENOUS VINYL FLOOR
VINIL HOMOGÉNEO



ROBERT KOCH INSTITUT



World Health Organization



ALTO TRÁFICO



ANTI DESLIZANTE



RESISTENTE AL AGUA



JUNTA TERMOSOLDADA



CAPA PUR ANTIBACTERIAL

INO FLOOR EEUU

304 INDIAN TRACE
WESTON, FL 33326
STE 626

INO FLOOR EEUU

30 N GOULD ST
SHERIDAN, WY 82801
STE 2299

inofloor.com